


Valcované profily krátke

Tyče ploché

Tyče ploché

rozmer b [mm]	prierez h [mm]	teoretická S [mm ²]	hmotnosť [kg/m]	rozmer b [mm]	prierez h [mm]	teoretická S [mm ²]	hmotnosť [kg/m]	rozmer b [mm]	prierez h [mm]	teoretická S [mm ²]	hmotnosť [kg/m]
10	3	30	0,236	35	6	210	1,650	60	5	300	2,36
	4	40	0,314		7	245	1,920		6	360	2,83
	5	50	0,390		8	280	2,200		7	420	3,30
12	3	36	0,283		10	350	2,750		8	480	3,77
	4	48	0,377		12	420	3,300		10	600	4,71
	5	60	0,471		14	490	3,850		12	720	5,65
	6	72	0,565		15	525	4,120		14	840	6,59
	8	96	0,754		16	560	4,400		15	900	7,07
14	3	42	0,353		20	700	5,500		16	960	7,54
	4	56	0,471		25	875	6,670		20	1200	9,42
	5	70	0,589	40	3	120	0,942		25	1500	11,80
	6	84	0,707		4	160	1,26		30	1800	14,10
15	3	45	0,350		5	200	1,57		35	2100	16,50
	4	60	0,470		6	240	1,88		40	2400	18,80
	5	75	0,590		7	280	2,20		50	3000	23,60
	6	90	0,710		8	320	2,51	65	4	260	2,04
	8	120	0,940		10	400	3,14		5	325	2,55
	10	150	1,180		12	480	3,77		6	390	3,06
16	3	48	0,377		15	600	4,71		8	520	4,08
	4	64	0,502		20	800	6,28		10	650	5,10
	5	80	0,628		25	1000	7,85		12	780	6,12
	6	96	0,754		30	1200	9,42		15	975	7,65
	8	128	1,000	45	3	135	1,06		16	1040	8,16
	10	160	1,260		4	180	1,41		20	1300	10,20
20	2	40	0,314		5	225	1,77		25	1625	12,80
	3	60	0,471		6	270	2,12	70	3	210	1,65
	4	80	0,628		7	315	2,47		4	280	2,20
	5	100	0,785		8	360	2,83		5	350	2,75
	6	120	0,942		10	450	3,53		6	420	3,30
	7	140	1,100		12	540	4,24		7	490	3,85
	8	160	1,260		14	630	4,95		8	560	4,40
	10	200	1,570		15	675	5,30		10	700	5,50
	12	240	1,880		16	720	5,65		12	840	6,59
	14	280	2,200		20	900	7,07		14	980	7,69
	15	300	2,360		25	1125	8,83		15	1050	8,24
25	2	50	0,393		30	1350	10,60		16	1120	8,79
	3	75	0,589	50	3	150	1,18		20	1400	11,00
	4	100	0,785		4	200	1,57		25	1750	13,70
	5	125	0,981		5	250	1,96		30	2100	16,50
	6	150	1,180		6	300	2,36		40	2800	22,00
	7	175	1,370		7	350	2,75	75	3	225	1,77
	8	200	1,570		8	400	3,14		4	300	2,36
	10	250	1,960		10	500	3,93		5	375	2,94
	12	300	2,360		12	600	4,71		6	450	3,53
	14	350	2,750		14	700	5,50		8	600	4,71
	15	375	2,940		15	750	5,89		10	750	5,89
30	2	60	0,471		16	800	6,28		12	900	7,07
	3	90	0,707		20	1000	7,85		15	1125	8,83
	4	120	0,942		25	1250	9,81		20	1500	11,80
	5	150	1,180		30	1500	11,80		25	1875	14,70
	6	180	1,410		40	2000	15,70	80	3	240	1,88
	7	210	1,650	55	4	220	1,73		4	320	2,51
	8	240	1,880		5	275	2,16		5	400	3,14
	10	300	2,360		6	330	2,59		6	480	3,77
	12	360	2,830		8	440	3,45		7	560	4,40
	14	420	3,300		10	550	4,32		8	640	5,02
	15	450	3,530		12	660	5,18		10	800	6,28
	16	480	3,770		15	825	6,48		12	960	7,54
	20	600	4,710		20	1100	8,64		14	1120	8,79
35	3	105	0,824		25	1375	10,08		15	1200	9,42
	4	140	1,100	60	3	180	1,41		20	1600	12,60
	5	175	1,370		4	240	1,88		25	2000	15,70

S235JR+AR, S355J2+AR
 EN 10025:2005,
 EN 10059:2004
 STN 42 5522,
 TDP: STN 42 0138
 C35, C45, C60
 16MnCr5, 20MnCr5,
 42CrMo4
 EN 10083:2006/2007,
 EN 10059:2004,
 EN 10084, EN 10028

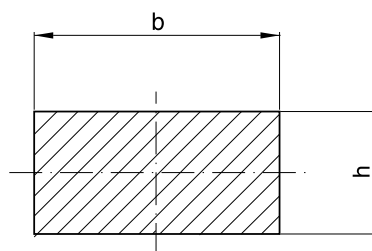

Valcované profily krátke

Tyče ploché

Tyče ploché

S235JR+AR, S355J2+AR

EN 10025:2005,

EN 10059:2004

STN 42 5522,

TDP: STN 42 0138

C35, C45, C60


16MnCr5, 20MnCr5,

42CrMo4

EN 10083:2006/2007,

EN 10059:2004,

EN 10084, EN 10028

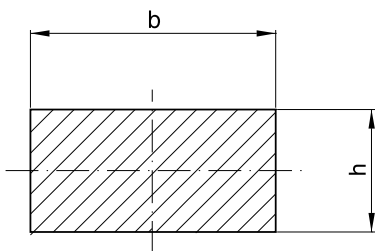

	rozmer		prierez teoretická			rozmer		prierez teoretická			rozmer		prierez teoretická	
	b [mm]	h [mm]	S [mm ²]	hmotnosť [kg/m]		b [mm]	h [mm]	S [mm ²]	hmotnosť [kg/m]		b [mm]	h [mm]	S [mm ²]	hmotnosť [kg/m]
80	30	2400	18,80	120	15	1800	14,10	180	5	900	7,2			
	40	3200	25,10		18	2160	17,00		6	1080	8,6			
	50	4000	31,40		20	2400	18,80		8	1440	11,5			
	60	4800	37,70		25	3000	23,60		10	1800	14,4			
90	3	270	2,12		30	3600	28,30		12	2160	17,3			
	4	360	2,82		35	4200	33,00		15	2700	21,6			
	5	450	3,53		40	4800	37,70		20	3600	28,8			
	6	540	4,24		45	5400	42,40		25	4500	35,0			
	7	630	4,95		50	6000	47,10		30	5400	43,7			
	8	720	5,65		60	7200	56,50	200	5	1000	8,0			
	10	900	7,07	130	5	650	5,10		6	1200	9,6			
	12	1080	8,48		6	780	6,41		8	1600	12,8			
	15	1350	10,60		8	1040	8,16		10	2000	16,0			
	20	1800	14,10		10	1300	10,20		12	2400	19,2			
	25	2250	17,70		11	1430	11,20		15	3000	24,0			
	30	2700	21,20		12	1560	12,20		20	4000	32,0			
	40	3600	28,30		15	1950	15,30		25	5000	39,0			
	50	4500	35,30		16	2080	16,30		30	6000	48,0			
100	3	300	2,35		18	2340	18,40		40	8000	64,0			
	4	400	3,14		20	2600	20,40	220	8	1760	14,1			
	5	500	3,93		25	3250	25,50		10	2200	17,6			
	6	600	4,71		30	3900	30,60		12	2640	21,1			
	7	700	5,50		35	4550	35,70		15	3300	26,4			
	8	800	6,28		40	5200	40,80		20	4400	35,2			
	10	1000	7,85		45	5850	45,90	240	10	2400	19,2			
	11	1100	8,64		50	6500	51,00		12	2880	23,0			
	12	1200	9,42		140	5	700	5,50		15	3600	28,8		
	14	1400	11,00		6	840	6,67		20	4800	38,4			
	15	1500	11,80		8	1120	8,79	250	5	1250	10,0			
	18	1800	14,10		10	1400	11,00		6	1500	12,0			
	20	2000	15,70		11	1540	12,10		8	2000	16,0			
	25	2500	19,60		12	1680	13,20		10	2500	20,0			
	30	3000	23,60		15	2100	16,50		12	3000	24,0			
	35	3500	27,50		18	2520	19,80		15	3750	30,0			
	40	4000	31,40		20	2800	22,00		20	5000	40,0			
	45	4500	35,30		25	3500	27,50		25	6250	50,0			
	50	5000	39,30		30	4200	33,00		30	7500	60,0			
	60	6000	47,10		35	4900	38,50		40	10000	80,0			
110	5	550	4,32		40	5600	44,00	280	10	2800	22,4			
	6	660	5,82	150	5	750	5,87		15	4200	33,6			
	8	880	6,91		6	900	7,02	300	6	1800	14,1			
	10	1100	8,64		8	1200	9,42		8	2400	19,2			
	11	1210	9,50		10	1500	11,80		10	3000	24,0			
	12	1320	10,40		11	1650	13,00		12	3600	28,8			
	15	1650	13,00		12	1800	14,10		15	4500	36,0			
	18	1980	15,50		15	2250	17,70		20	6000	48,0			
	20	2200	17,30		18	2700	21,20		25	7500	60,0			
	25	2750	21,60		20	3000	23,60		30	9000	72,0			
	30	3300	25,90		25	3750	29,40							
	35	3850	30,20		30	4500	35,30							
	40	4400	34,50		35	5250	41,20							
	45	4950	38,90		40	6000	47,10							
	50	5500	43,20		50	7500	58,90							
120	3	360	2,82	160	5	800	6,4							
	4	480	3,76		6	960	7,7							
	5	600	4,71		8	1280	10,2							
	6	720	6,02		10	1600	12,8							
	8	960	7,54		12	1920	15,4							
	10	1200	9,42		15	2400	19,2							
	11	1320	10,40		20	3200	25,6							
	12	1440	11,30		25	4000	31,4							
	14	1680	13,20		30	4800	38,4							

Valcované profily krátke

Tyče ploché

Tyče ploché - Široká oceľ

rozmer b [mm]	rozmer h [mm]	prierez S [mm ²]	teoretická hmotnosť [kg/m]
350	8	2800	22,4
	10	3500	28,0
	12	4200	33,6
	15	5250	42,0
400	20	7000	56,0
	8	3200	25,6
	10	4000	32,0
	12	4800	38,4
450	15	6000	48,0
	20	8000	64,0
	8	3600	28,8
	12	5400	43,2
500	15	6750	54,0
	8	4000	32,0
	10	5000	40,0
	12	6000	48,0
600	15	7500	60,0
	20	10000	80,0
	8	4800	38,4
	10	6000	48,0
	15	9000	72,0

S235JR+AR, S355J2+AR
 EN 10025:2005,
 EN 10059:2004
 STN 42 5522,
 TDP: STN 42 0138
 C35, C45, C60
 16MnCr5, 20MnCr5,
 42CrMo4
 EN 10083:2006/2007,
 EN 10059:2004,
 EN 10084, EN 10028

